
OSRAM

TRUCKSTAR PRO

Brightest OSRAM truck light



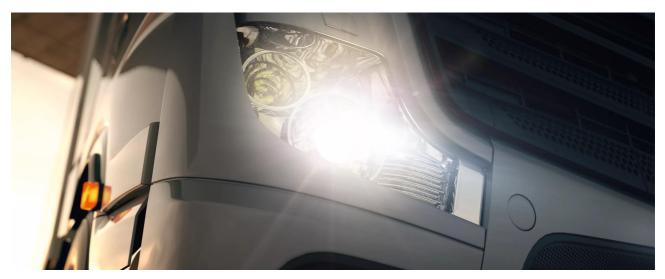

Excellent brightness More light allows to see farther and therefore react sooner



More than double the service life Reduced downtime and fleet costs compared to standard lamps



Very high vibration resistance Suitable for heavy duty applications



The most powerful halogen truck light from OSRAM

Discover TRUCKSTAR PRO signal lamps - the brightest truck light from OSRAM with excellent value for money. With up to 100% more light than standard lamps, extremely long life and very high vibration resistance these 24 volt lamps are ideal for professional drivers while reducing downtime and fleet costs. Thanks to the high vibration resistance, TRUCKSTAR PRO lamps are suitable even for heavy duty applications. Due to their impressive brightness and more than double the service life compared to standard lamps, the lamps improve your safety while driving on the road.

Technical data

	Product information	General Product Information	Electrical	Electrical Data			
Product description	Application (Category and Product specific)	Global order reference	Power input	Nominal voltage	Nominal wattage		
TRUCKSTAR PRO P21/5W	Auxiliary lamp	7537TSP	28 / 10 W	24.0 V	21/5 W		
TRUCKSTAR PRO W5W	Auxiliary lamp	2845TSP	7 W	24.0 V	5 W		
TRUCKSTAR PRO P21W	Auxiliary lamp	7511TSP	28 W	24.0 V	21 W		
TRUCKSTAR PRO PY21W	Auxiliary lamp	7510TSP	28 W	24.0 V	21 W		
TRUCKSTAR PRO R10W	Auxiliary lamp	5637TSP	12.5 W	24.0 V	10 W		
TRUCKSTAR PRO R5W	Auxiliary lamp	5627TSP	7 W	24.0 V	5 W		
TRUCKSTAR PRO T4W	Auxiliary lamp	3930TSP	5 W	24.0 V	4 W		

			Photometric Data		Physical Attributes & Dimensions	
Product description	Power input tolerance	Test voltage	Nominal luminous flux	Luminous flux tolerance	Lamp base	
TRUCKSTAR PRO P21/5W	±6 / ±10 %	28.0 V	440/40 lm	±15 / ±20 %	BAY15d	
TRUCKSTAR PRO W5W	±10 %	28.0 V	50 lm	±20 %	W2.1x9.5d	
TRUCKSTAR PRO P21W	±6 %	28.0 V	460 lm	±15 %	BA15s	
TRUCKSTAR PRO PY21W	±6 %	28.0 V	250 lm	±20 %	BAU15s	
TRUCKSTAR PRO R10W	±10 %	28.0 V	125 lm	±20 %	BA15s	
TRUCKSTAR PRO R5W	±10 %	28.0 V	50 lm	±20 %	BA15s	
TRUCKSTAR PRO T4W	±10 %	28.0 V	35 lm	±20 %	BA9s	

			Lifetime Data		Capabilities	Certificates & standards
Product description	Length	Diameter	Lifespan B3	Lifespan Tc	Technology	ECE category
TRUCKSTAR PRO P21/5W	52.5 mm	25.0 mm	100 / 1000 hr	200 / 2000 hr	AUX	P21/5W
TRUCKSTAR PRO W5W	26.8 mm	10.0 mm	1000 hr	4000 hr	AUX	W5W
TRUCKSTAR PRO P21W	52.5 mm	25.0 mm	250 hr	500 hr	AUX	P21W
TRUCKSTAR PRO PY21W	52.5 mm	25.0 mm	250 hr	500 hr	AUX	PY21W
TRUCKSTAR PRO R10W	37.5 mm	16.0 mm	1000 hr	2000 hr	AUX	R10W
TRUCKSTAR PRO R5W	37.5 mm	16.0 mm	500 hr	1000 hr	AUX	R5W
TRUCKSTAR PRO T4W	27.4 mm	9 mm	550 hr	1000 hr	AUX	T4W

	Environmental & Regulatory Information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACh)					
Product description	Primary article identifier	Candidate list substance 1	Declaration no. in SCIP database			
TRUCKSTAR PRO P21/5W	4008321798138 4062172158480 4052899423695 4062172121132	No declarable substances contained	No declarable substances contained			
TRUCKSTAR PRO W5W	4052899560543 4008321798077 4062172158305	No declarable substances contained	No declarable substances contained			
TRUCKSTAR PRO P21W	4008321852311 4062172285452 4052899341296 4062172285438 4062172158459	No declarable substances contained	No declarable substances contained			
TRUCKSTAR PRO PY21W	4052899341333 4062172121217 4062172121095 4062172121231 4062172158428 4008321856944	No declarable substances contained	No declarable substances contained			
TRUCKSTAR PRO R10W	4062172158398 4008321821232	No declarable substances contained	No declarable substances contained			
TRUCKSTAR PRO R5W	4062172158367 4008321821201	No declarable substances contained	No declarable substances contained			
TRUCKSTAR PRO T4W	4062172158336 4008321795106 4008321174055 4008321842589	No declarable substances contained	No declarable substances contained			

Download Data

 File

 User instruction
 GPRS_Safety symbols instructions

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.





0'0





